

- ✓ 1kW HF/PFC Charger
- ✓ 400W 12V Converter
- ✓ System Cost Reduction

Designed for Onboard Use

The QuiQ-dci is specifically built for onboard operation in harsh automotive environments. Rugged, lightweight and intelligent design provides continuous operation in any application. High efficiency power conversion allows the QuiQ-dci to offer 1 kiloWatt of charging or 400 Watts of DC power in the same fully sealed enclosure. Reliability is increased by the reduction of moving parts and cable interconnections.

Approved Charge Algorithms

The QuiQ-dci can store up to 10 Delta-Q-developed charge algorithms. Delta-Q has designed algorithms for many battery types, sizes and chemistries, and battery manufacturers have certified them. Manufacturing and field service personnel can easily toggle between algorithms as batteries change and download new algorithms into the charger "on the fly."



Universal Input

QuiQ-dci is designed with a wide input voltage range from 85 - 265 VAC, making it an ideal choice for any worldwide application. Power Factor Correction and 12A maximum current draw ensures the charger will work reliably from any power outlet in the world, even through surges and sags.

The isolated 400 Watt DC-DC converter provides clean, continuous power from your 48V or 72V battery pack, without taking any more valuable space.

Regulatory Compliance

The QuiQ-dci is UL and CE compliant and has passed stringent EMI, safety, vibration and water ingress protection (IP) tests. QuiQ-dci offers leading-edge efficiency, power factor correction and GFCI compatibility for safe and reliable operation.

System Cost Reduction

Replace two separate components with the QuiQ-dci, and take advantage of space, weight, storage, inventory management, wiring harness, installation labor and field service savings.

The QuiQ-dci is that unique product that meets all the typical design constraints faced by the electric vehicle engineer.

For more information contact:

Delta-Q Technologies Corp.
Unit 3, 5250 Grimmer Street
Burnaby, BC V5H 2H2
Canada

tel: 604.327.8244
fax: 604.327.8246
email: info@delta-q.com
www.delta-q.com





- Integrated unit saves space, weight and cabling, while increasing system reliability
- Advanced high frequency switching design and 90% typical efficiency
- Wide range AC input (85 - 265 VAC) for worldwide operation
- Fully sealed enclosure provides improved reliability in demanding environments
- > 0.99 Power Factor minimizes utility surcharges and optimizes use of AC power
- Approved battery charge algorithms for ideal charging (default I₁, I₂, U, I_{3a})

QuiQ-dci HF/PFC Battery Charger / DC-DC Converter Specifications

subject to change without notice

DC Output (Charger)	QuiQ-dci Model:	
	922-4852	922-7252
DC Output Voltage - nominal	48 V	72 V
DC Output Voltage - maximum	68 V	100 V
DC Output Current - maximum	18 A	12 A
Interlock Current - maximum	1 A	0.5 A
Battery Type	Specific to selected algorithm	
Reverse Polarity	Electronic protection - auto-reset	
Short Circuit	Electronic current limit	

DC Output (Converter)

DC Output Voltage	13.5 +/- 0.7 V	
Output Current - continuous/peak	30 A / 60 A	
Output Lines	Switched, Direct (unswitched)	
No-load power draw	< 0.7 W	
DC Input (Battery) Voltage - range	35 - 87 V	50 - 130 V

AC Input

AC Input Voltage - range	85 - 265 VAC	
AC Input Voltage - nominal	120 VAC / 230 VAC rms	
AC Input Frequency	45 - 65 Hz	
AC Input Current - maximum/nominal	12 A / 9.5 A rms @ 120 VAC or 5 A rms @ 230 VAC	
AC Power Factor - nominal	> 0.99 @ 120 VAC / > 0.98 @ 230 VAC	

Mechanical

Dimensions	28.0 x 24.6 x 11.0 cm (11 x 9.7 x 4.3")	
Weight	< 6 kg (< 13 lbs)	
Environmental	Enclosure: IP46 (NEMA4)	
Operating Temperature	-30°C to +50°C (-22°F to 122°F), derated above 30°C (86°F), below 0°C (32°F)	
Storage Temperature	-40°C to +70°C (-40°F to 158°F)	
AC input connector	IEC320/C14 (requires ≥ 1.8m localized cord)	
DC output connector	MOLEX MX150L Series	

Regulatory

Safety	UL2202, UL1564 2nd Edition, CSA-C22.2 No. 107.2, EN 60335-1/2-29	
Emissions	FCC Part 15/ICES 003 Class A, EN 55011, EN 61000-3-2, EN 61000-3-3	
Immunity	EN 61000-4-2/-3/-4/-5/-6/-11	

Operation

AC ON	Solid YELLOW AC LED	
>80% Charge Indicator	Solid YELLOW Charge LED	
100% Charge Indicator	Solid GREEN Finish LED	
Fault Indicator	Flash RED Fault LED	
DC Ammeter	LED Bargraph (6 level)	
Long-term Storage Mode	Auto-restart if battery voltage < 2.1 V/cell or 30 days elapse	

Special Features

• Temperature Sensor Input	• Remote LED
• PC-based field reprogramming software	


Options

• Dry Contact AC On Relay	• MODBUS Serial Communications
• OEM Specific DC Output Cords	• Localized AC Input Cord



Rear view of QuiQ-dci shows Panel Mount DC Connectors (48 V output on left, 12 V output on right). Mate with OEM Specific DC Output Cords.

QuiQ-dci and the Power in Motion slogan are trademarks of Delta-Q Technologies Corp. Copyright © 2008 Delta-Q Technologies Corp.

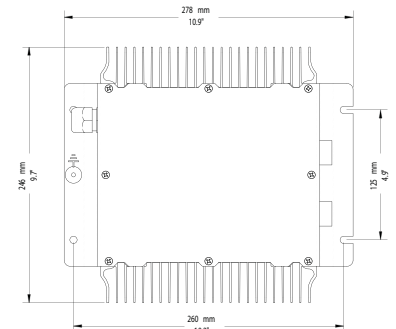

For more information contact:

Delta-Q Technologies Corp.
Unit 3, 5250 Grimmer Street
Burnaby, BC V5H 2H2
Canada

tel: 604.327.8244
fax: 604.327.8246
email: info@delta-q.com
www.delta-q.com